

G04 Series

Maximum Flow Rate: 11.2 l/min (2.9 gpm)

Maximum Pressure: 200 bar (2900 psi) for Metallic Pump Heads




WANNER
Hydra-Cell[®]
Seal-less Pump Technology



G04 with Stainless Steel pump head



G04 with Brass pump head

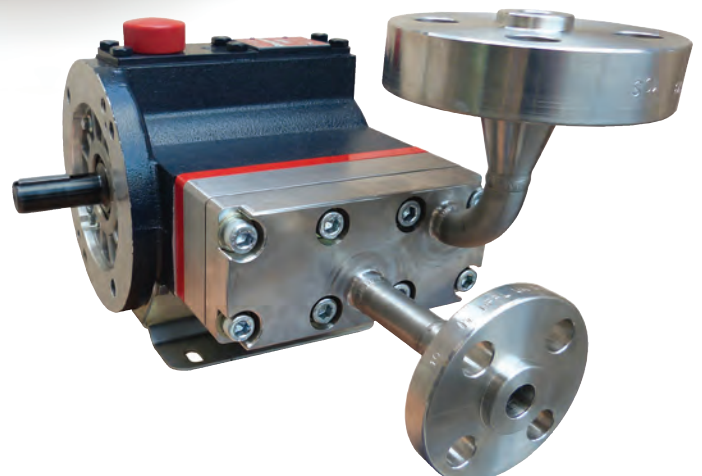

G04 with Stainless Steel pump head and ANSI RF flanges.

G04 Series Performance

Capacities

Flow

Model	Max. Input rpm	Max. Flow @ 172 bar (2500 psi)	
		gpm	l/min
G04-X	1750	2.9	11.2
G04-E	1750	2.0	7.7
G04-S	1750	1.6	6.2



Pressure

Maximum Inlet Pressure
34 bar (500 psi)

Maximum Discharge Pressure
200 bar (2900 psi) at 875 rpm (max.) = 5.6 l/min

Performance and specification ratings apply to G04 configurations unless specifically noted otherwise.

Maximum Flow at Designated Pressure

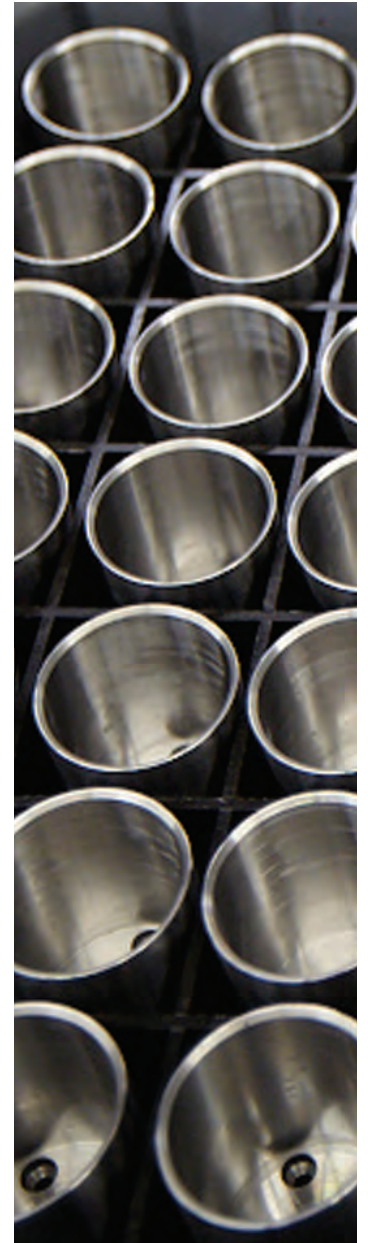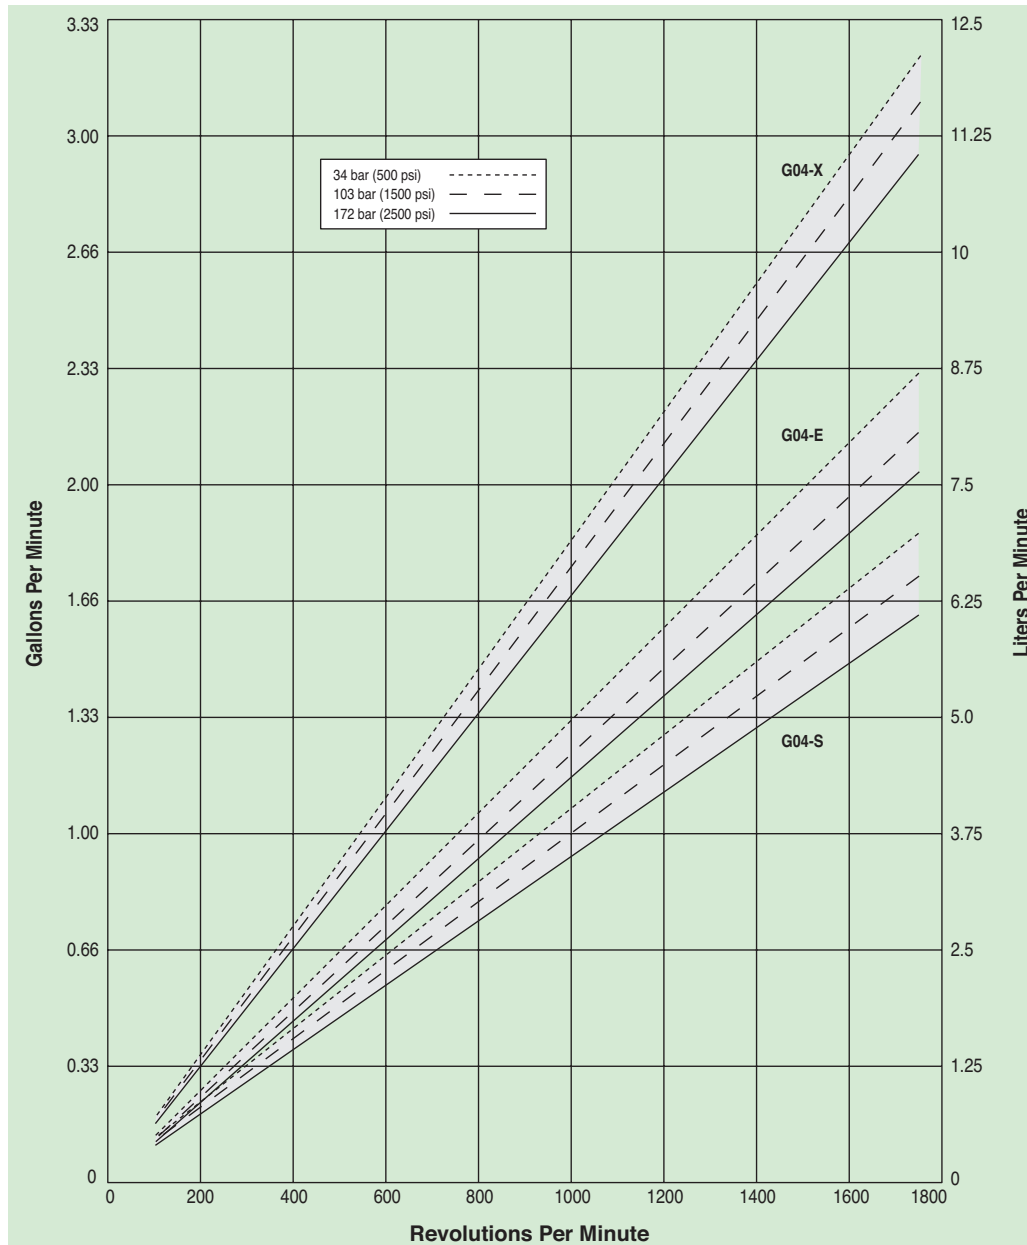

G04 Series Specifications

Flow Capacities @ 172 bar (2500 psi) 4-pole Motor @ 50 Hz

Model	rpm	gpm	l/min
G04-X	1450	2.40	9.1
G04-E	1450	1.74	6.6
G04-S	1450	1.35	5.1

Flow Capacities @ 172 bar (2500 psi) 6-pole Motor @ 50 Hz

Model	rpm	gpm	l/min
G04-X	960	1.58	6.0
G04-E	960	1.16	4.4
G04-S	960	0.87	3.3

Delivery

Model	gal/rev		
	@34 bar (500 psi)	@103 bar (1500 psi)	@172 bar (2500 psi)
G04-X	0.0019	0.0018	0.0017
G04-E	0.0013	0.0012	0.0012
G04-S	0.0011	0.0010	0.0009

Model	liters/rev		
	@34 bar (500 psi)	@103 bar (1500 psi)	@172 bar (2500 psi)
G04-X	0.0070	0.0067	0.0064
G04-E	0.0050	0.0047	0.0044
G04-S	0.0041	0.0039	0.0035

Maximum Discharge Pressure

Metallic Heads: 172 bar (2500 psi)

Maximum Inlet Pressure 34 bar (500 psi)

Maximum Operating Temperature

Metallic Heads: 121 °C (250 °F) - Consult factory for correct component selection for temperatures from 71 °C (160 °F) to 121 °C (250 °F).

Maximum Solids Size 200 microns

Inlet Port
1/2 inch BSPT
1/2 inch NPT
600lb ANSI RF Flange

Discharge Port
1/2 inch BSPT
1/2 inch NPT
2500lb ANSI RF Flange

Shaft Diameter 22.2 mm (7/8 inch)

Shaft Rotation Reverse (bi-directional)

Bearings Precision ball bearings

Oil Capacity 1.05 liters (1.1 US quarts)

Weight 37 lbs. (16.8 kg)

Calculating Required Power

$$\frac{6 \times \text{rpm}}{63,000} + \frac{\text{gpm} \times \text{psi}}{1,460} = \text{electric motor hp}$$


$$\frac{6 \times \text{rpm}}{84,428} + \frac{\text{l/min} \times \text{bar}}{511} = \text{electric motor kW}$$

Calculating Pulley Size

$$\frac{\text{motor pulley OD}}{\text{pump rpm}} = \frac{\text{pump pulley OD}}{\text{motor rpm}}$$

When using a variable frequency controller (VFD) calculate the hp or kW at minimum and maximum pump speed to ensure the correct hp or kW motor is selected. Note that motor manufacturers typically de-rate the service factor to 1.0 when operating with a VFD.

Net Positive Suction Head (NPSHr)

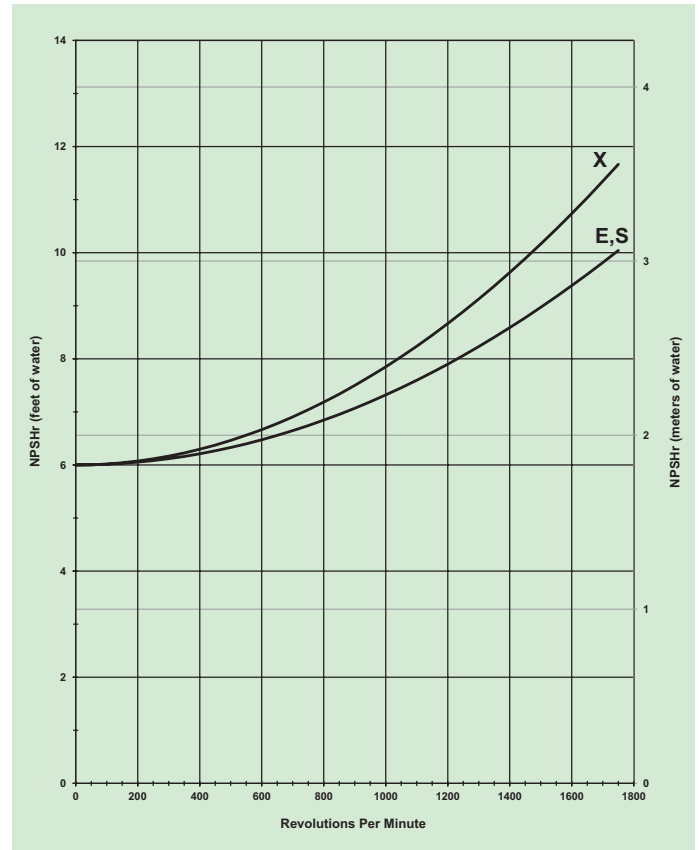


Self-priming:

Each Hydra-Cell pump has different lift capability depending on model size, cam angle, speed, and fluid characteristics. To ensure that your specific lift characteristics are met, refer to the inlet calculations regarding friction, and acceleration head losses in your Hydra-Cell Installation & Service Manual. Compare those calculations to the NPSHr curves above.

G04 Series Representative Drawings



G04 Models with Metallic Pump Head mm (Inches)

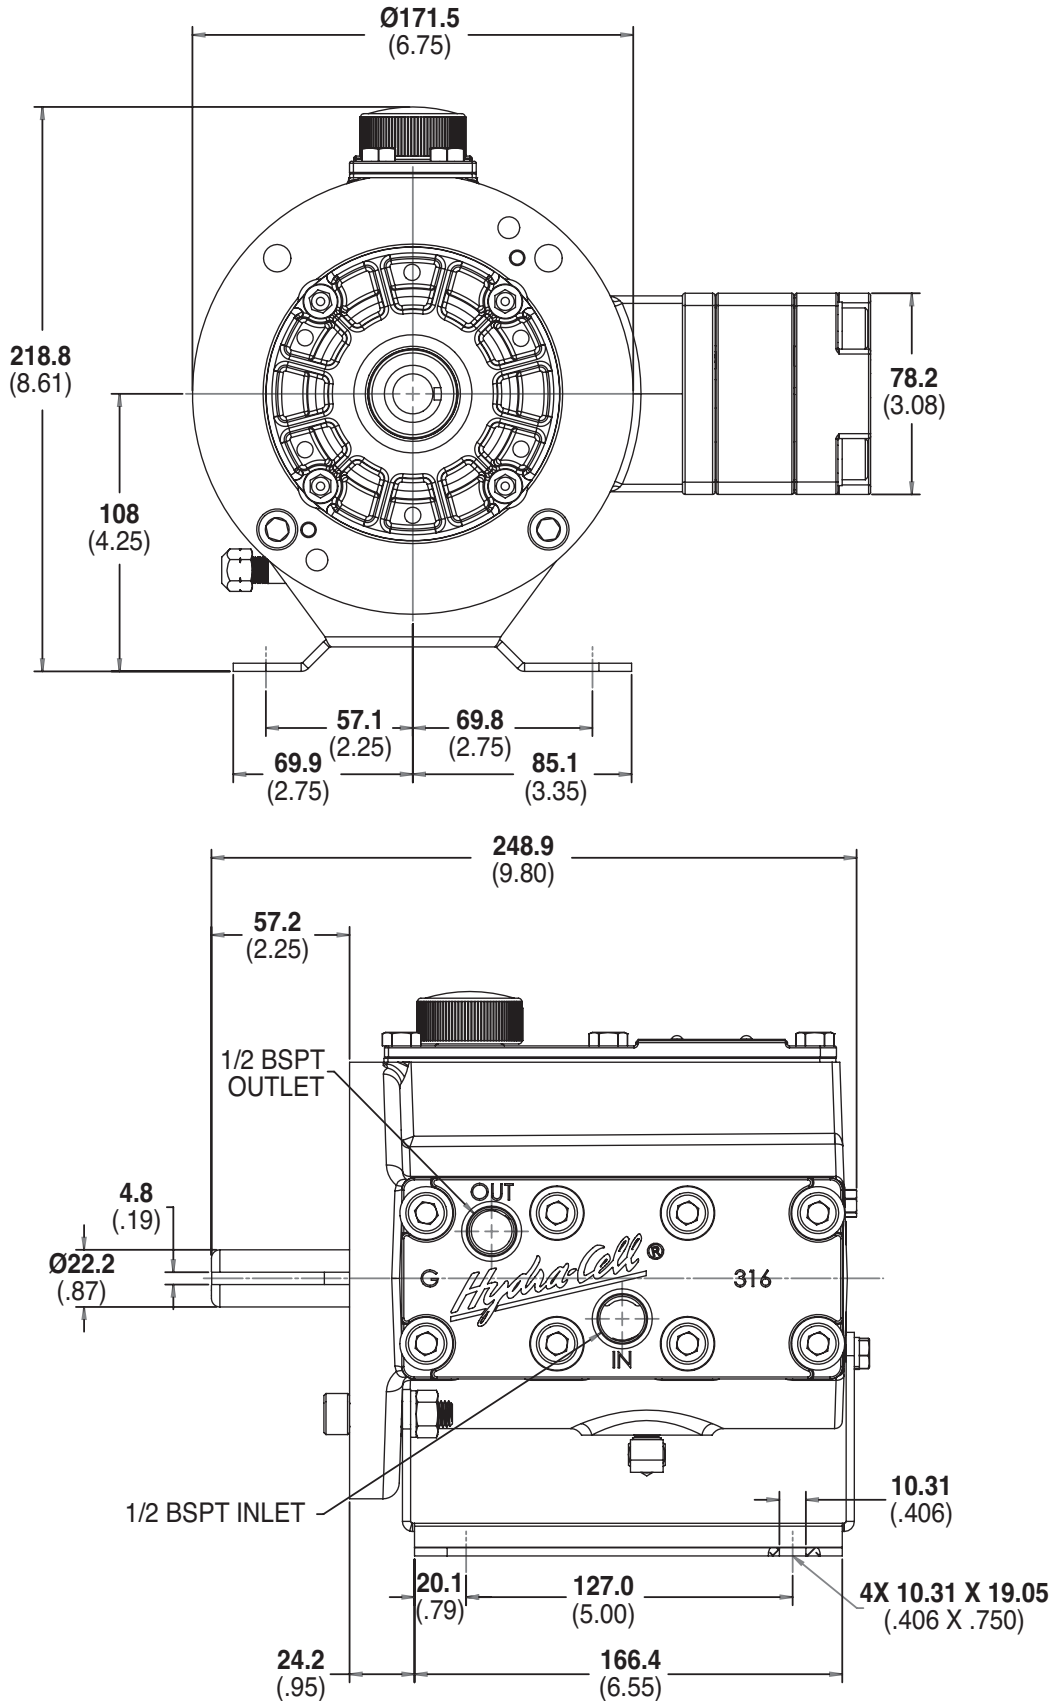

Note: Contact factory for additional drawings of specific models and configurations.

G04 Series Representative Drawings

G04 Models with ANSI RF Flanges mm (Inches)

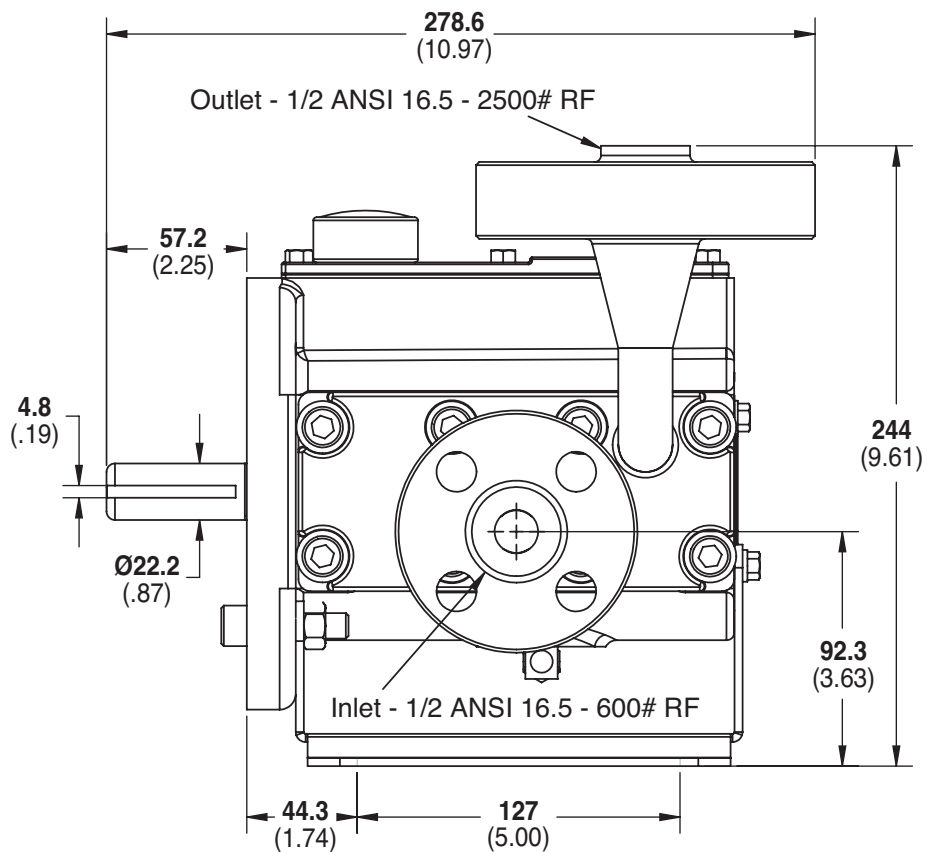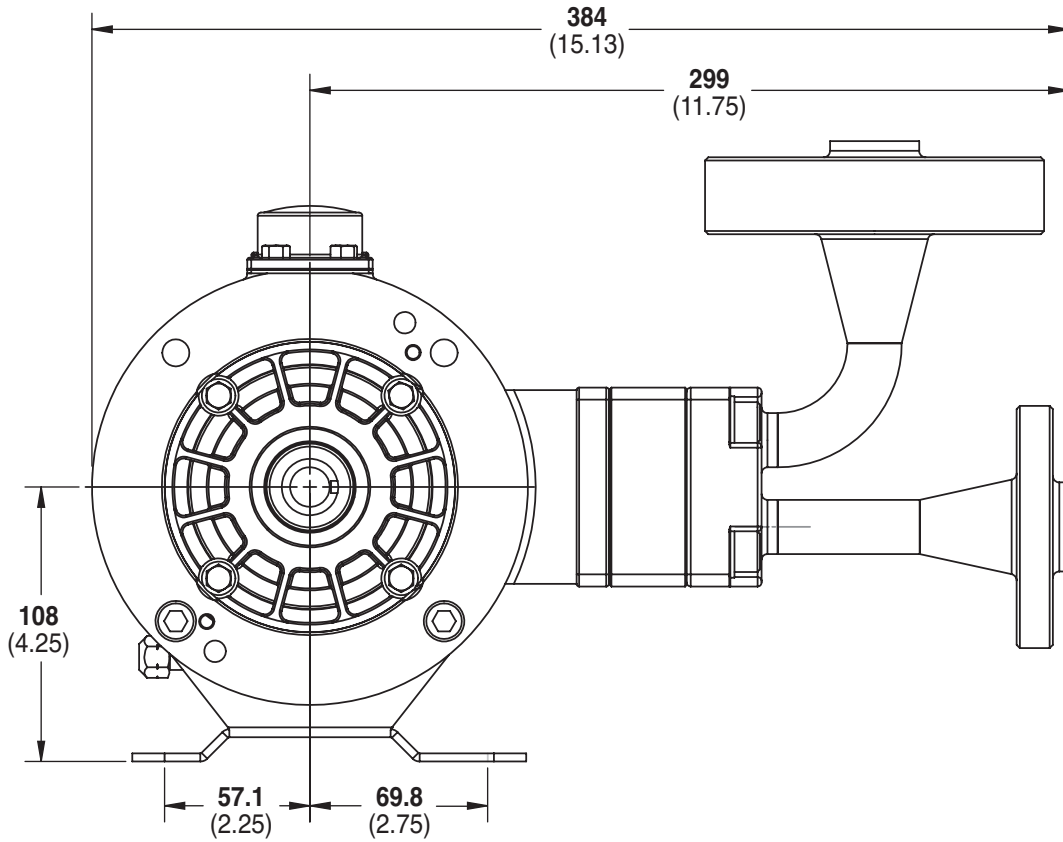

Note: Contact factory for additional drawings of specific models and configurations.


G04 Series **Adaptors/Valves/Baseplates**

Pump/Motor Adaptor mm (Inches)

Part Number: A04-003-I202

Must be ordered separately for G04 models for use with IEC 80 - 90 frame motors, B5 flange.


NEMA adaptor available - consult factory.

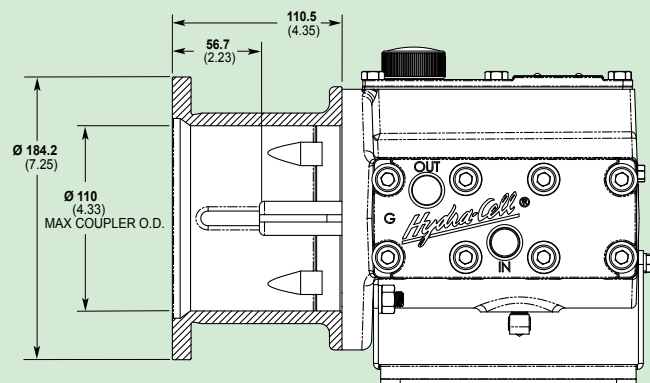

Part Number: A04-004-I202

Must be ordered separately for G04 models for use with IEC 100 - 112 frame motors, B5 flange.

NEMA adaptor available - consult factory.

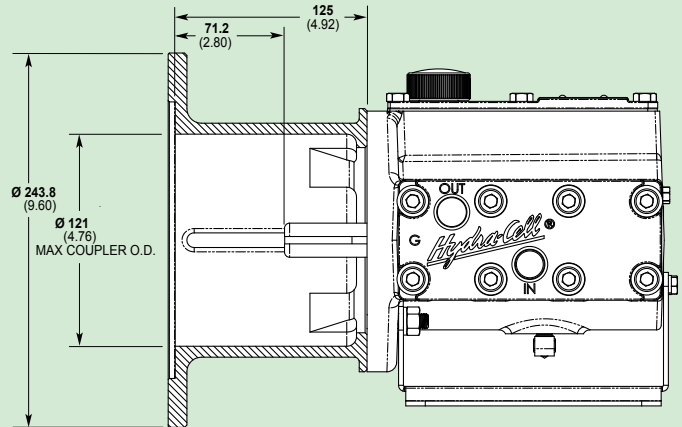


Valve Selection

A seal-less C62 Pressure Regulating Valve is recommended for Hydra-Cell G04 pumping systems, especially for high-pressure requirements or when handling dirty fluids.



IEC Baseplates

Complete assembly (excluding pump and motor) for IEC 80, 90, 100 and 112 frame motors in 304 Stainless Steel.

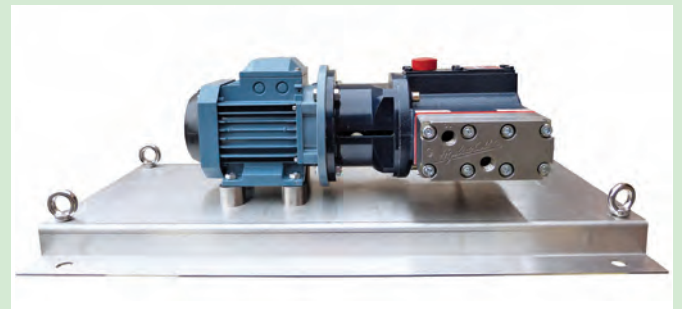

G04 Series **How to Order**

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12
G	0	4									

A complete G04 Series Model Number contains 12 digits including 9 customer-specified design and materials options, for example: G04SABTHFECG.

Digit	Order Code	Description
1-3	G04	Pump Configuration Shaft-driven (BSPT Ports)* <i>*Pump/motor adaptors ordered separately. See previous page.</i>
4	X	Hydraulic End Cam Max 9.1 l/min (2.4 gpm) @ 1450 rpm
	E	Max 6.6 l/min (1.7 gpm) @ 1450 rpm
	S	Max 5.1 l/min (1.3 gpm) @ 1450 rpm
5	D	Pump Head Version BSPT Ports
	-	ATEX <i>(Note: ATEX 94/9/EC Certified, Category 2, Zone 1. Includes certificate and oil level monitor.)</i>
6	B	Pump Head Material Brass
	R	304 Stainless Steel
	S	316L Stainless Steel
	-	316L Stainless Steel with ANSI RF flange class 600lb x 2500lb
7	E	Diaphragm & O-ring Material EPDM (requires EPDM-compatible oil - Digit 12 oil code J)
	G	FKM
	J	PTFE
	P	Neoprene
	T	Buna-N
8	D	Valve Seat Material Tungsten Carbide
	H	17-4 Stainless Steel
	N	Nitronic 50
9	D	Valve Material Tungsten Carbide
	F	17-4 Stainless Steel
	N	Nitronic 50
10	E	Valve Springs Elgiloy
	T	Hastelloy C

Digit	Order Code	Description
11		Valve Spring Retainers
	C	Celcon
	H	17-7 Stainless Steel
	M	PVDF
	P	Polypropylene
	Y	Nylon
12		Hydra-Oil
	G	5W30 cold-temp severe-duty synthetic oil
	J	20-wt EPDM-compatible oil
	K	Food-contact oil





WANNER ENGINEERING - WORLD HEADQUARTERS & MANUFACTURING
Minneapolis USA
t: (612) 332-5681
e: sales@wannereng.com

WANNER PUMPS
Kowloon HONG KONG
t: +852 3428 6534
e: sales@wannerpumps.com

WANNER INTERNATIONAL
Hampshire UK
t: +44 (0) 1252 816847
e: sales@wannerint.com

WANNER ENGINEERING
Latin American Office
t: +55 (11) 4081-7098
e: sales@wannereng.com

WANNER PUMPS
Shanghai CHINA
t: +86-21-6876 3700
e: sales@wannerpumps.com